



ATM 5 - DSNG



www.atm-es.com



+34 917 131 700



ATM 5 HD – DSNG



AUDIO

- Audio Mixer YAMAHA MG. 12/4 FX. 12 Inputs /4 Outputs. 4 Analog stereo audio distribution amplifiers DTL.
- Audio Monitor WHOLER AMP1 S8.
- Intercom PROSPECT 6K.

VIDEO

- Standard HDSDI (SMPTE 292M).
- Video Matrix NEVION HD.
- 3 HD Digital video distribution amplifiers NEVION.
- Waveform analyzer TRANSVIDEO HD.
- 7 HD video monitors.

TRANSMISSION

- Fully redundant uplink chain: 1+1 EUTELSAT STATION CODE E-306. HISPASAT STATION CODE ATM 5.
- EIRP: 71/68 Dbw.
- 2 Encoder NTT 9100+ 2 AZIMUTH AZ110- Video codification : 4:2:2. MPEG 4/2 HD DVBS & DVBS 2. QPSK, 8PSK. Encryption BISS E / BISS 1.
- HPA's XICOM XT 400W+200W XTC 114D. Redundant HPA Controller.
- Driveaway Antena GIGASAT DA 150 1,5 m. Gain transmission: 45dBi G/T:22,1dBk.
- 2 Decoder ERICSSON RX8200 HD 4:2:2 MPEG:2/4. BISS.
- Spectrum Analyzer Rhode&Schwarz FSH3.

ATM 5 HD – DSNG

ENERGY


- Power generator Honda 3.0i 3 KVA
- UPS RIELLO 3200WTS
- Connection type: CETAC 32 A Single Phase

VEHICLE

- Mercedes Vito 111
- Length: 5,3 m
- Wide: 2 m
- Height: 2,4 m
- Weight: 2.700 Kg

OTHERS

- VTRs (By Request)
- Hand, lavalier microphones
- Led, Hmi , Fluorescent, Fresnell ligths
- Mobile IFB
- ISDN Codec
- TVRO Satellite reception

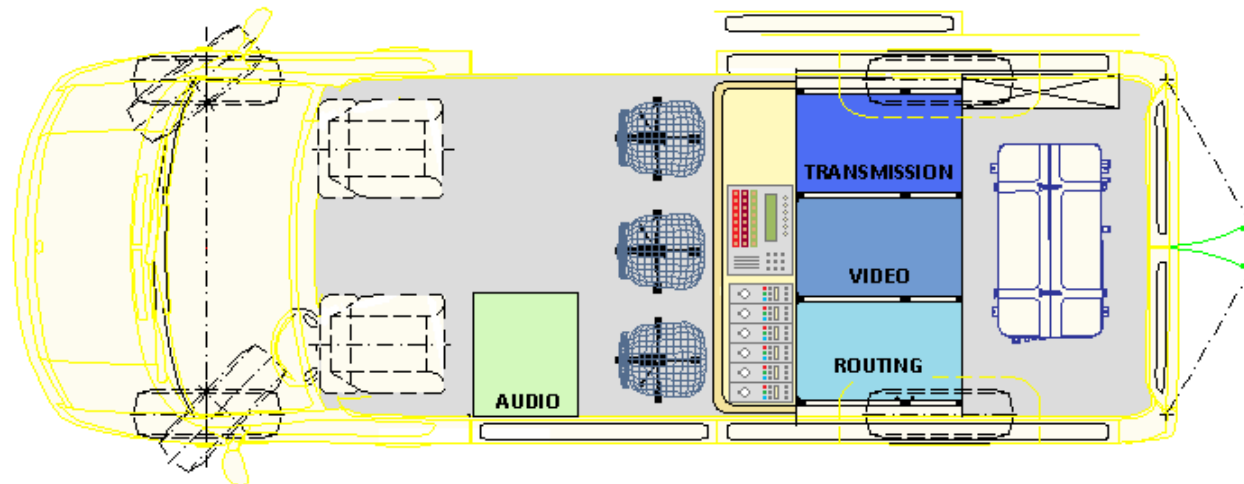

CONTÁCTANOS



info@atm-es.com



+34 917 131 700



www.atm-es.com

