



ATM 7 HD



www.atm-es.com



+34 917 131 700



ATM 7 HD – OB VAN FULLY REDUNDANT UPLINK



AUDIO

- Audio Mixer YAMAHA MG 12/4FX
12 Inputs
4 Outputs
- 3 Analog stereo audio distribution amplifiers DTL.
- Audio Monitor WHOLER AMP1 S8.
- Wireless EW365G2 Microphone and EW300IEMG2.
- Receiver Sennheiser systems.

VIDEO

- Standard HD (SMPTE 292M) & SD (SMPTE 259M) SDI.
- Video Matrix 12x12 Black Magic.
- 2 QUAD SPLIT HD/SD.
- Waveform analyzer TRANSVIDEO HD SD.

TRANSMISSION

- Fully redundant uplink chain: 2+0, 1+1
EUTELSAT STATION CODE E 357
HISPASAT STATION CODE ATM 7
- EIRP : 71/68 Dbw.
- 2 Encoder NTT 9100+ 2 AZIMUTH AZ110 Video codification : 4:2:2.
MPEG 4/2 HD / SD.
- DVBS & DVBS 2. QPSK, 8PSK.
- Encryption BISS E / BISS 1.
- HPA's XICOM XT 400W+200W XTC 114D. Redundant HPA Controller.
- Driveaway Antena HOLKIRK 1,2 m Gain transmission: 43dBi
G/T:22,1dBk.
- 2 Decoder ERICSSON RX8200 HD 4:2:2 MPEG:2/4. BISS.
- Spectrum Analyzer Rhode&Schwarz FSH3.

ATM 7 HD – OB VAN FULLY REDUNDANT UPLINK

ENERGY


- Power generator onan 5000D
- U.P.S. 3000WTS
- DSNG Connection type: CETAC 32 A Single phase

VEHICLE

- Mercedes Vito 111
- Length: 5,3 m
- Wide: 2 m
- Height: 2,5 m
- Weight: 2.600 Kg

OTHERS

- VTRs (By
- Hand, lavalier microphones
- Flourescent panels
- Mobile IFB
- ISDN C odec
- TVRO Satellite reception

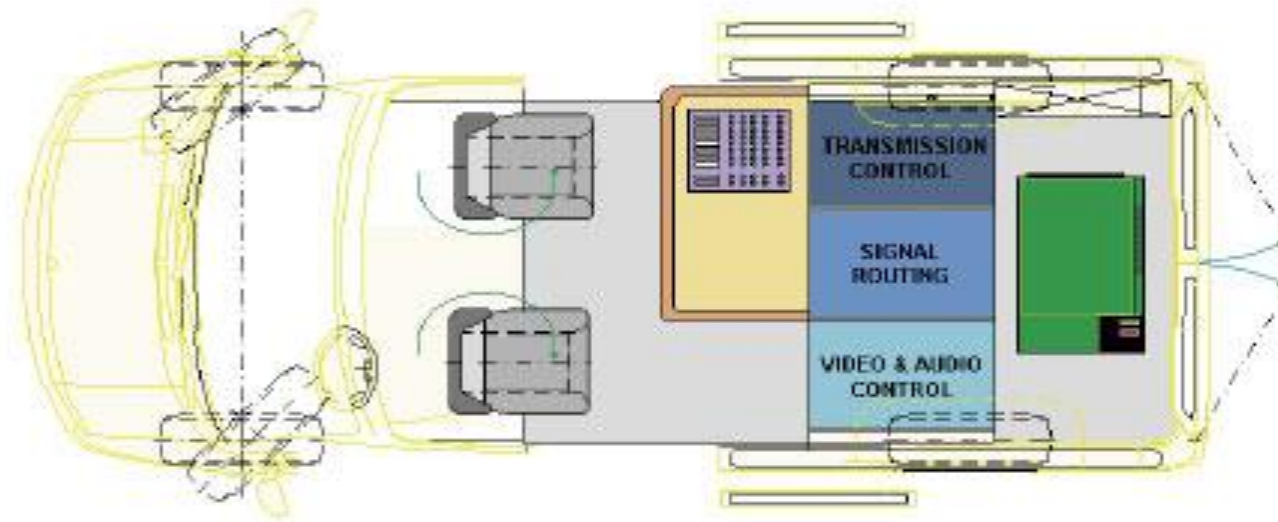

CONTÁCTANOS



info@atm-es.com



+34 917 131 700



www.atm-es.com

